
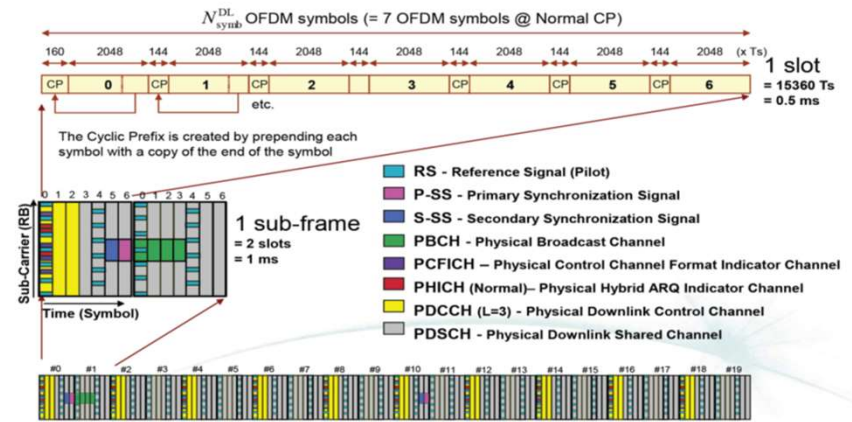
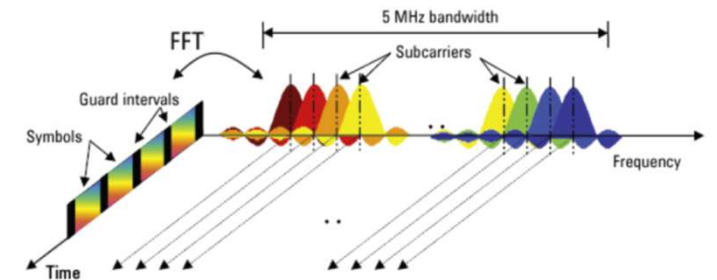


IEE 2620: System Aspects in Communications

Professor Muhammad Mahtab Alam

Lecture 12

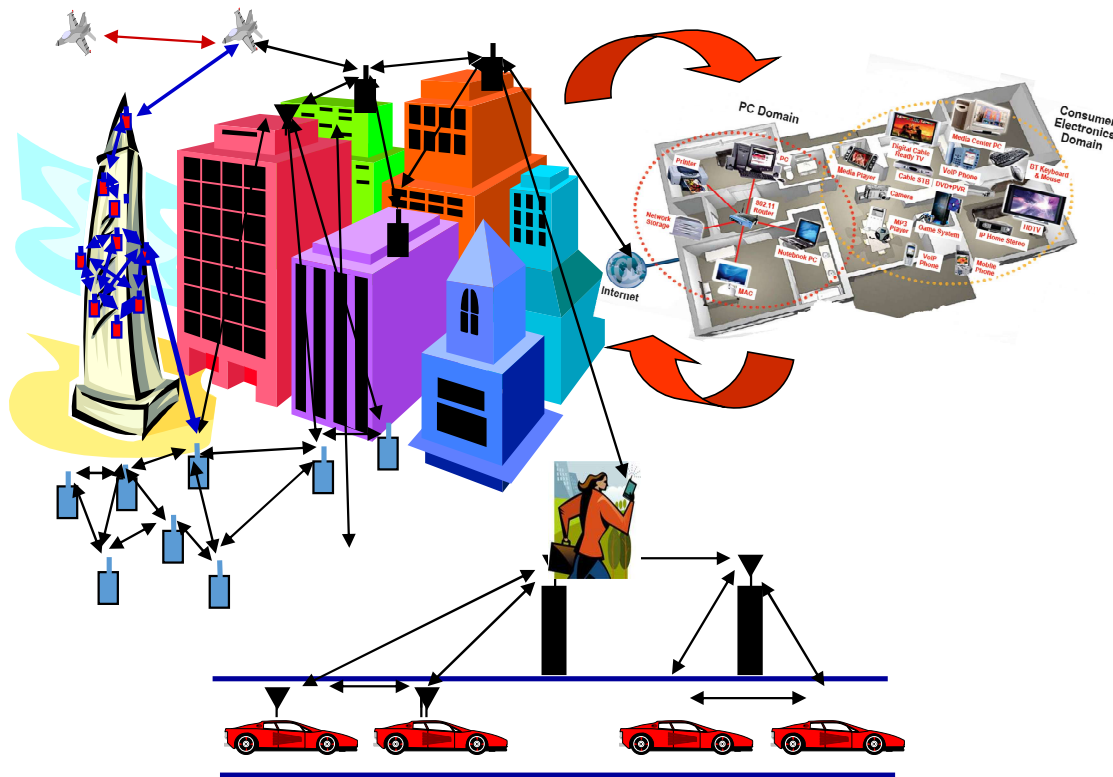

Outline

- Brief follow-up from last lecture
- Radio Access Techniques
 - Multiple Access (MA) Methods
 - FDMA
 - TDMA
 - CDMA
- Orthogonal Frequency Division Multiplexing (OFDM) Based Multiple Access (OFDMA)
 - Orthogonality Principle
 - OFDM
 - OFDM-FDMA
 - MC/SC-FDMA
- Comparisons
- Summary

Wireless Channel Characteristics (1/4)

- When the signal is transmitted over the wireless channel, it encounters four main effects:
 - Attenuation
 - Delay
 - Multipath
 - Doppler Effect (if there is any relative motion between transmitter and receiver).

Wireless Channel Characteristics (2/4)

- Attenuation and Delay

- Due to the **unavoidable physical disturbances**, these effects are present in almost every wireless system. **This may be rain drops, trees etc. The electromagnetic waves travel through the atmosphere and they lose energy and take some time to reach the receiver.**
- For example, in case of rain drops, **the waves collide with the rain drops, heat them up and lose a part of energy.**

Wireless Channel Characteristics (3/4)

- Multipath phenomena
 - Due to various scatters and obstacles, the transmitted signal reaches the receiver in one or more versions.
 - Each version with a different time delay. These different versions form the composite signal at the receiver which may vary in amplitude and phase.

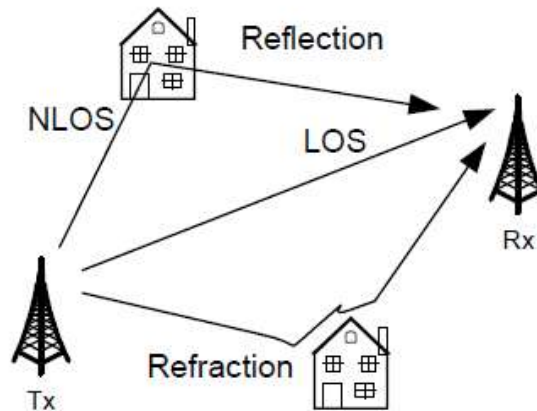


Illustration of multipath propagation. NLOS means non-line of sight and LOS is simply line of sight.


Wireless Channel Characteristics (3/4)

- Doppler Effect

- This effect occurs when there is a **relative motion between the transmitter and the receiver**.
- Due to this effect, there is a **phase change in the received signal and hence the shift in frequency**. This shift in frequency, also known as the Doppler shift is [Rappaport, 1996]:

$$f_d = (v/\lambda)\cos\theta$$


- where f_d is the Doppler shift, v is the velocity at which transmitter or receiver is moving, λ is the wavelength and θ is the angle of arrival of the received signal with respect to the direction of motion.
- The illustration of the Doppler effect can be seen in the Figure.

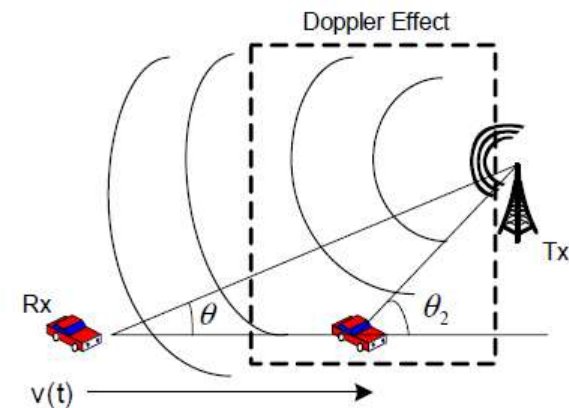

Radio Access Methods and Techniques

Fundamentals

- In **multiuser systems the system resources** must be divided among multiple users
- A multiuser channel refers to any channel that must be shared among multiple users. There are two different types of multiuser channels:
 - The uplink channel
 - The downlink channel

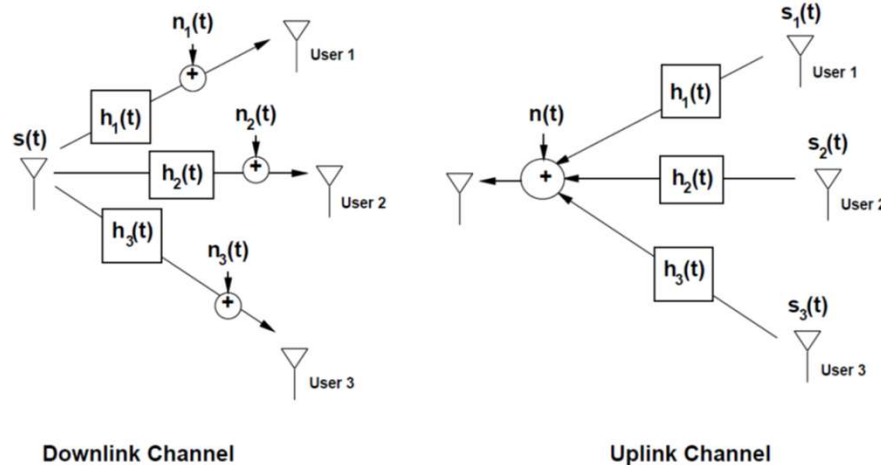

What is Multiple Access?

- Efficient allocation of signaling dimensions between users is a key design aspect of both uplink and downlink channels, **since bandwidth is usually scarce and/or very expensive**. When dedicated channels are allocated to users it is often called multiple access. **Multiple access techniques divide up the total signaling dimensions into channels** and then **assign these channels to different users**. The most common methods to divide up the signal space are along the **time, frequency, and/or code axes**.
- Radio resource are limited
 - Limited Bandwidth
 - Limited number of channels
- The radio resource must be shared among multiple users
- Multiple Access Control is needed
 - Contention-based
 - Non-contention-based

Contention-based Multiple Access(MA)

- Contention-based
 - Each terminal transmits in a decentralized way
 - No central controller (Base stations or access points)
 - Example:
 - ALOHA: The Aloha protocol is a multiple access method that allows multiple nodes to share a communication channel without centralized control. It works by allowing nodes to transmit data whenever they have it, and if a collision occurs, they retransmit after a random delay. There are two main variations: Pure Aloha and Slotted Aloha.
 - Carrier Sensing Multiple Access (CSMA): User sense the channel before it transmits in an attempt to avoid possible collisions

Standard:

- GSM [1] uses the slotted ALOHA in the terminal's initial access process
- IEEE 802.11 uses CSMA/CA based contention access scheme

Non-contention-based Multiple Access (MA)

- **A logic controller (BS or AP) is needed** to coordinate the transmissions of all the terminals
- The controller informs each device when and on which channel it can transmit
- Collisions can be avoided entirely
- Two Subdivisions
 1. **Non-channelization**
 2. **Channelization**


Channelization

Non-contention-based MA

- Terminals transmit simultaneously using different channels
- Most commonly used protocols in cellular systems
- Example:
 - 1. Time Division Multiple Access (TDMA)
 - 2. Code Division Multiple Access (CDMA)
 - 3. Frequency Division Multiple Access (FDMA)
- Time-division multiple access (TDMA) and frequency-division multiple access (FDMA) are orthogonal channelization methods whereas code-division multiple access (CDMA) can be orthogonal or non-orthogonal, depending on the code design


Time Division Multiple Access (TDMA)

- In TDMA the system **dimensions are divided along the time axis into non-overlapping channels**, and each user is assigned a different cyclically-repeating timeslot, as shown in Figure
- These TDMA channels occupy the **entire system bandwidth**, which is typically wideband, so some form of **ISI mitigation is required**. The cyclically repeating timeslots imply that transmission is not continuous for any user. Therefore, digital transmission techniques which allow for buffering are required
- Global System for Mobile Communication (GSM)
- (Some Specs.)
 - Time slot 0.577 ms
 - Frame 4.6 ms
 - 8 time slots per frame
 - Frequency band 20 KHz

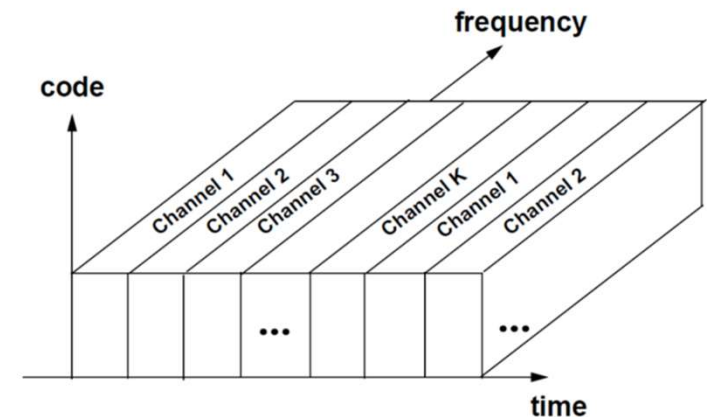


Code Division Multiple Access (CDMA)

- In CDMA the **information signals of different users are modulated by orthogonal or non-orthogonal spreading codes**. The resulting spread signals simultaneously occupy the same time and bandwidth, as shown in Figure below.
- **The receiver uses the spreading code structure to separate out the different users**. The most common form of CDMA is multiuser spread spectrum with either direct sequence (DS) or frequency hopping (FH)
- IS-95 aka CDMAOne (Some Specs.)
 - Orthogonal Walsh codes
 - 64 codes (channels)
 - One pilot channel
 - Seven paging channels
 - 55 traffic channels
 - Each carrier 1.25 MHz

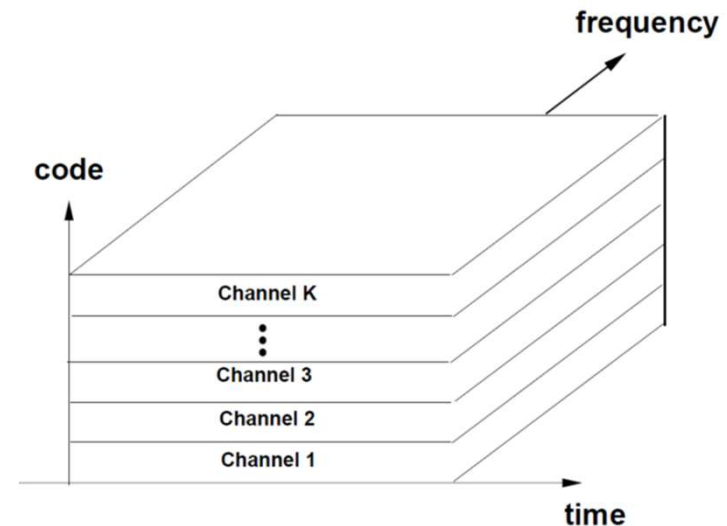

Frequency Division Multiple Access (FDMA)

- In FDMA the system signaling dimensions are divided along the **frequency axis** into “**non-overlapping channels**”, and **each user** is assigned a **different frequency channel**, as shown in Figure below.
- The channels often have **guard bands** between them to compensate for imperfect filters, adjacent channel interference, and spectral spreading due to Doppler.
- **Multiple access in OFDM systems, called OFDMA**, implements FDMA by assigning different subcarriers to different users.
- Some Specs.
 - Total Bandwidth 25 MHz
 - Each Channel 30 KHz

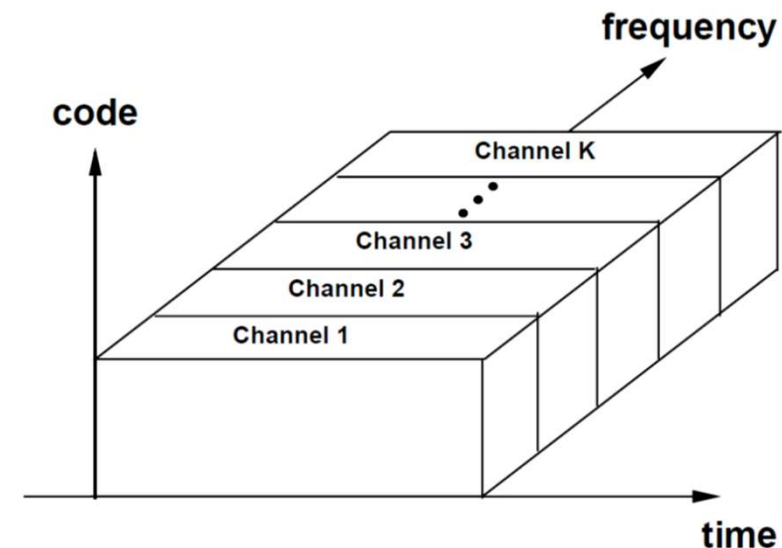


Orthogonal Frequency Division Multiplexing (OFDM) Based Multiple Access (OFDMA)

OFDM is a frequency-division multiplexing (FDM) **scheme used as a digital multi-carrier modulation method**. A large number of closely **spaced orthogonal sub-carrier signals** are used to **carry data on several parallel data streams or channels**.

- **Orthogonality Principle**
- **OFDM**
- **OFDM-FDMA**

Orthogonality Principle (1/3)

- **Vector space**
- The angle between two vectors
 - If θ is the angle between the vectors a and b , then:
 - $a \cdot b = |a| |b| \cos \theta$
 - **A, B** and **C** vectors in space are orthogonal to each other (if):
 - **$A \cdot B = B \cdot C = C \cdot A = 0$**

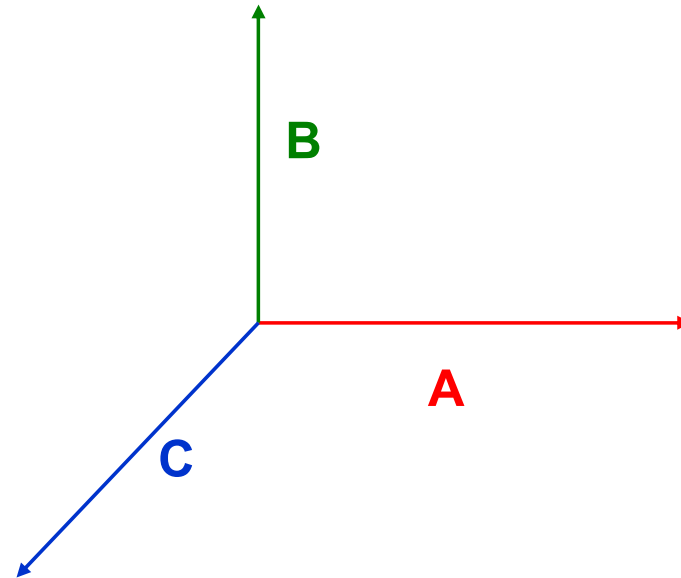

Orthogonality Principle (2/3)

- Real Function space

$$f_1(t) = A \sin(wt)$$


$$f_2(t) = B \cos(wt)$$

$$\int_{\tau}^{\tau+T} f_1(t) f_2(t) dt = 0$$


$$f_m(t) = M \sin(mwt)$$

$$f_n(t) = N \cos(nwt)$$

$$\int_{\tau}^{\tau+T} f_m(t) f_n(t) dt = 0$$

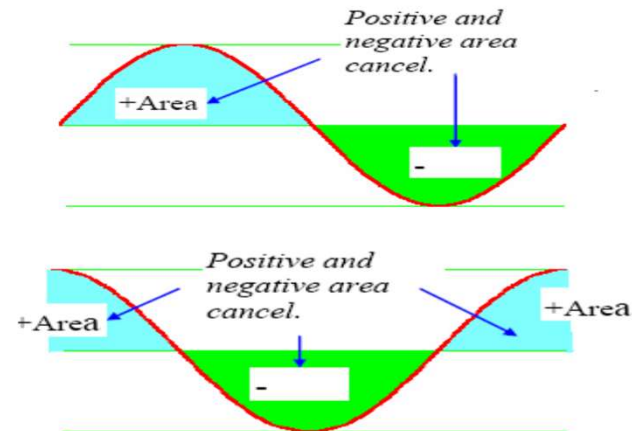

Orthogonality Principle (3/3)

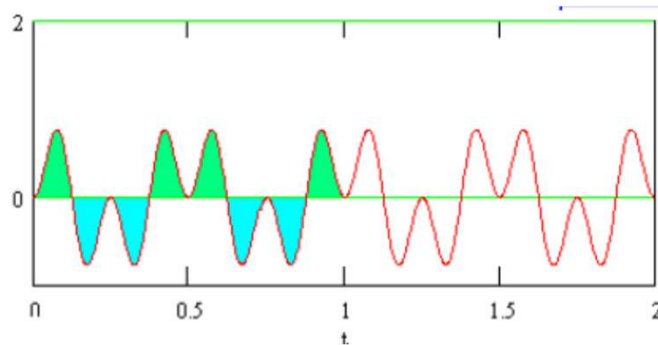

$$f(t) = \sin(wt)\sin(2wt)$$

$$\forall m, n \in \mathbb{N}$$


$$\int_0^T \sin(mwt)\sin(nwt)dt = 0 \text{ where } m \neq n$$

$$\int_0^T \sin(mwt)\cos(nwt)dt = 0$$

Here ***mw*** and ***nw*** are called ***m-th*** and ***n-th*** harmonics of ***w*** respectively


Orthogonal frequency division multiple access OFDM

- The Figure below illustrates the key features of an OFDM signal in frequency and time.
 - In the **frequency domain**, multiple adjacent tones or **subcarriers** are each **independently modulated with data**
 - Then in the **time domain**, **guard intervals** are inserted between each of the **symbols** to prevent inter-symbol interference at the receiver caused by multi-path delay spread in the radio channel.

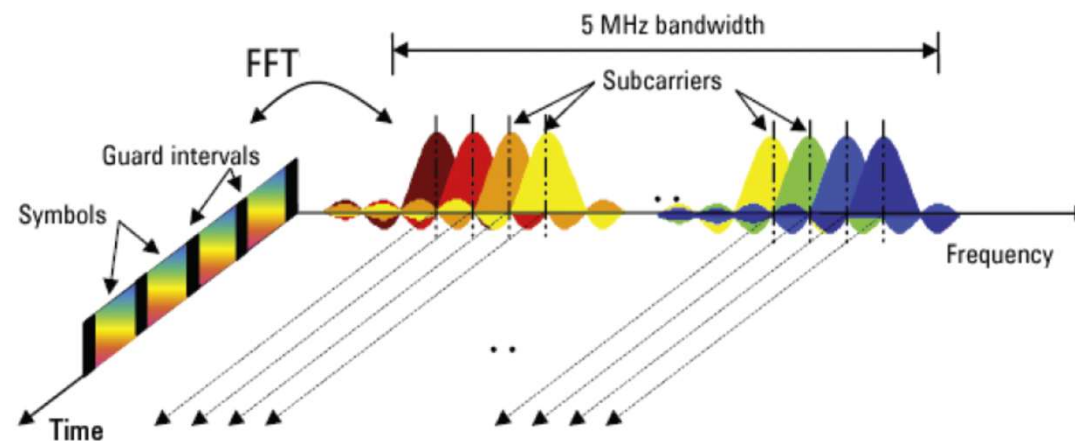


Advantages of OFDM

- When compared to the CDMA technology upon which UMTS is based, OFDM offers a number of distinct advantages:
 - OFDM can easily be **scaled up to wide channels** that are more resistant to fading.
 - **OFDM can be made completely resistant to multi-path delay spread.** This is possible because the **long symbols used for OFDM can be separated by a guard interval known as the cyclic prefix (CP)**. “The CP is a copy of the end of a symbol inserted at the beginning”. By sampling the received signal at the optimum time, the receiver can remove the time domain interference between adjacent symbols caused by multi-path delay spread in the radio channel.
 - **Efficient use of Spectrum**

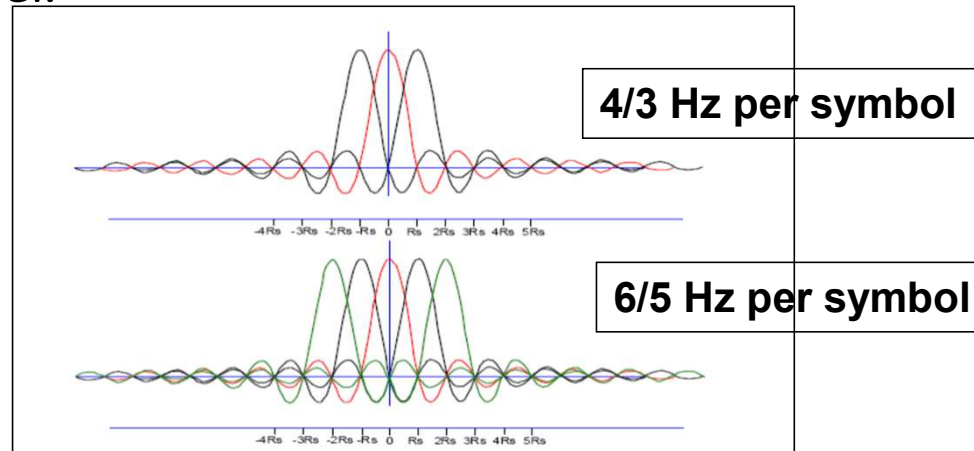

Disadvantages of OFDM

- OFDM does have some disadvantages.
 - The subcarriers are **closely spaced making OFDM sensitive to frequency errors** and phase noise.
 - For the same reason, **OFDM is also sensitive to Doppler shift**, which causes interference between the subcarriers.
 - Pure OFDM also creates **high peak-to-average signals**, and that is why a modification of the technology called **SC-FDMA is used in the uplink**.
- It is known that OFDM will be more difficult to operate than CDMA at the edge of cells.
 - **CDMA uses scrambling codes to provide protection from inter-cell interference at the cell edge** whereas OFDM has no such feature. Therefore, some form of frequency planning at the cell edges will be always required.

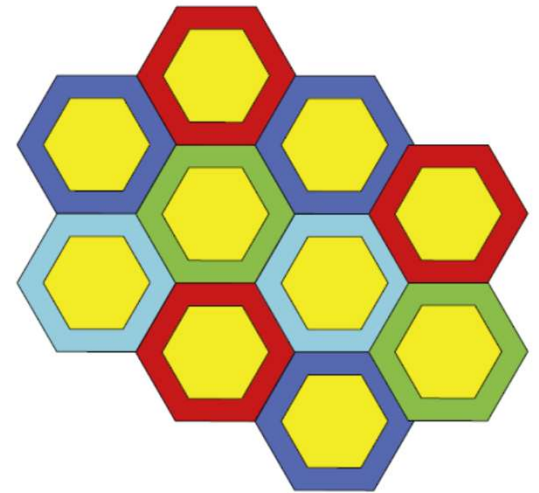

Comparison

- **Frequency division multiple access** or **FDMA** is a channel access method used in multiple-access protocols as a **channelization** protocol.
- **FDMA** gives users an individual allocation of one or several frequency bands, or channels. ... **FDMA** requires **high-performing filters** in the radio hardware, in contrast to **TDMA** and **CDMA**

Multiple access technology – Downlink/Uplink

- Downlink and uplink transmission in 4G and 5G are based on the use of multiple access technologies, specifically:
 - orthogonal frequency division multiple access (OFDMA) for the downlink
 - single-carrier frequency division multiple access (SC-FDMA) for the uplink